

EPSON®

EXCEED YOUR VISION

Epson LX-1170 II

Epson is the world's largest manufacturer of dot matrix printers with a product range that offers the ultimate in high speed, low cost, reliable and durable printing across all stationery types. Ideal for drafting, high volume data processing, and multi-part stationery – for which there is simply no alternative – no other technology offers such broad capability from a single machine.


The Epson LX-1170II is the ideal 9-pin printer for light duties. The copy capability of one original plus four copies makes the Epson LX-1170II suitable for a variety of environments including data reporting (e.g. telephone statistics and call log in, helpdesk and computer systems reporting), listings, shipping documents and measurement and control systems.

Key features

- Wide carriage 9-pin printer
- Up to 337 characters per second (12 cpi)
- Prints up to 5-part forms (1 original + 4 copies)
- Versatile top, bottom and rear paper paths
- 8 built-in Bar code fonts
- Parallel and serial interfaces as standard
- USB interface

Options

- 50 sheet cut sheet feeder
- Roll paper holder
- Push/Pull tractor unit

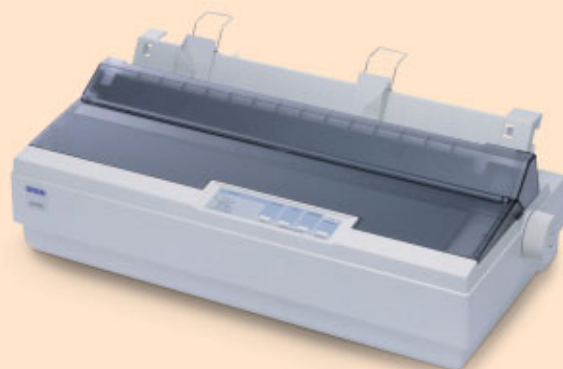

Printer model	LX-1170 II		
Printing method	Impact dot matrix		
Numbers of Pins	9 pins		
Columns	136 columns		
Colour	Grey		
Print direction	Bi-direction with logic seeking		
Control code	ESC/P, IBM 2381 Plus emulation		
Interface	Bi-directional parallel interface (IEEE-1284 nibble mode supported), Serial I/F, USB (ver.1.1) I/F		
Printable columns	Pitch (CPI)	Character per line	
	10 cpi	136	
	12 cpi	163	
	15 cpi	204	
	17 cpi condensed	233	
	20 cpi condensed	272	
Print speed	High speed draft:	10 cpi	300 cps
		12 cpi	337 cps
	Draft:	10 cpi	225 cps
		12 cpi	270 cps
	LQ:	10 cpi	56 cps
		12 cpi	67 cps
Paper handling	Paper Path Manual Insertion: Rear in, Top out Push Tractor: Rear in, Top out Pull Tractor: Rear/Bottom in, Top out Cut Sheet Feeder: Rear in, Top out		
Dimensions	Width: 546 mm Depth: 275 mm Height: 164 mm Weight: 6.6 kg		
Acoustic noise	49 dB (A)		
Line spacing	1/6 inch or programmable by 1/216 inch		
Multi copy	Original + 4		
Reliability	Mean print volume between failure (MVBF): 12 million lines (except print head) MTBF: 6000 POH Print head life: 400 million strokes per wire Input data buffer: 64 KBytes		
Printer driver / utility	OS:	Microsoft® Windows® 95/98/2000/Me/XP and Microsoft® Windows® NT® operating system Version 4.0	
	Utility:	EPSON Status Monitor 3 (Microsoft® Windows® 95/98/2000/ Me/XP and Microsoft® Windows® NT® operating system Version 4.0 environment only)	
Ribbon cartridge	Colour:	Black	
	Type:	Fabric	
	Ribbon life:	3 million characters (Draft 10 cpi, 14 dots/character)	
Environmental conditions (operating)	Temperature:	5 to 35 °C	
	Humidity:	10 to 80 % RH	
Electrical specifications	Rated voltage:	AC 120 V, AC 220 – 240 V	
	Rated frequency:	50 – 60 Hz	
	Power consumption:	Approx. 23 W (ISO/IEC10561 Letter pattern) Energy Star Compliant	
Options	50 sheets cut sheet feeder: C12C806392 Paper roll holder: C12C811141 Pull tractor unit: C12C800341		
Network options	EpsonNet 802.11b/g Wireless and 10/100 Base Tx External Print Server For Europe except United Kingdom: C12C824372 For United Kingdom: C12C824373		



www.epson-europe.com

All features and specifications described are subject to change without notice.
EPSON® is a registered trademark of SEIKO EPSON® Corporation.
Windows is a registered trademark of Microsoft Corporation in the United States and/or other countries.
Company and product names are trademarks or registered trademarks of their respective companies.

EPSON®